


WONDERTEX PREM FILLER

PLASTERBOARD JOINT FILLER

+ SMOOTH FINISH
+ EASY SANDING
+ MINIMAL SHRINKAGE, NO CRACKS
+ FAST SETTING

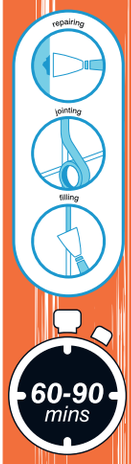

TECHNICAL DEFINITION

Plaster-based setting compound for filling plasterboard joints and gaps. Also suitable for embedding joint tapes, metal angles and corner reinforcements.

SUBSTRATES

Suitable for: plasterboard joints, plaster, most common interior substrates. Surfaces must be clean, dry, sound and free from dust.

TECHNICAL PROPERTIES

- Working time: approx. 60–90 minutes
- Super fine for a smooth finish
- Minimal shrinkage to reduce cracking
- Easy sanding for surface preparation
- Fast setting for early sanding

SAFETY

Use in well-ventilated areas. Avoid inhalation of dust during mixing. In case of contact with eyes, rinse thoroughly with water.

APPLICATION

The suggested mix ratio is 1 part water to 2 parts powder (6 litres of water per 12.5 kg bag). Mix thoroughly until a smooth lump free consistency is achieved, leave for 5 minutes then mix again. Apply to joints, embed tape if required, and smooth. Allow to set, then sand if necessary.

STORAGE

9 months in unopened packaging in a dry place, avoiding exposure to high temperature and frost.

PACKAGING

12.5 kg bags.

	prem fill & finish	prem texture	prem adhesive	prem finish	prem filler
sizes	7.5kg & 15kg	25kg	12.5kg	25kg	12.5kg
bonding	•		•		
repairing	•			•	•
jointing	•			•	•
filling	•				•
smoothing	•	•		•	
snagging	•			•	
texturing		•			
working time	60mins	180mins	60-90mins	180mins	60-90mins
apply 2nd coat	120-250mins	n/a	n/a	3-5hours	n/a

Made in France

ÉMISSIONS DANS L'AIR INTÉRIEUR A+ A+ A B C
Teneur en COV <1 g/L

wondertex® SEMIN GROUP

Wilberforce House, Station Road, London NW4 4QE, England
Tel: +44 1827 934643 • wondertex.co.uk